


# MATT CAN LOOK THIS NATURAL!

NEW: THE TEXTURED  
DUROPAL XTREME TOUCH  
FINISH

MAKE  
YOUR  
VISIONS  
WORK.

MADE IN GERMANY



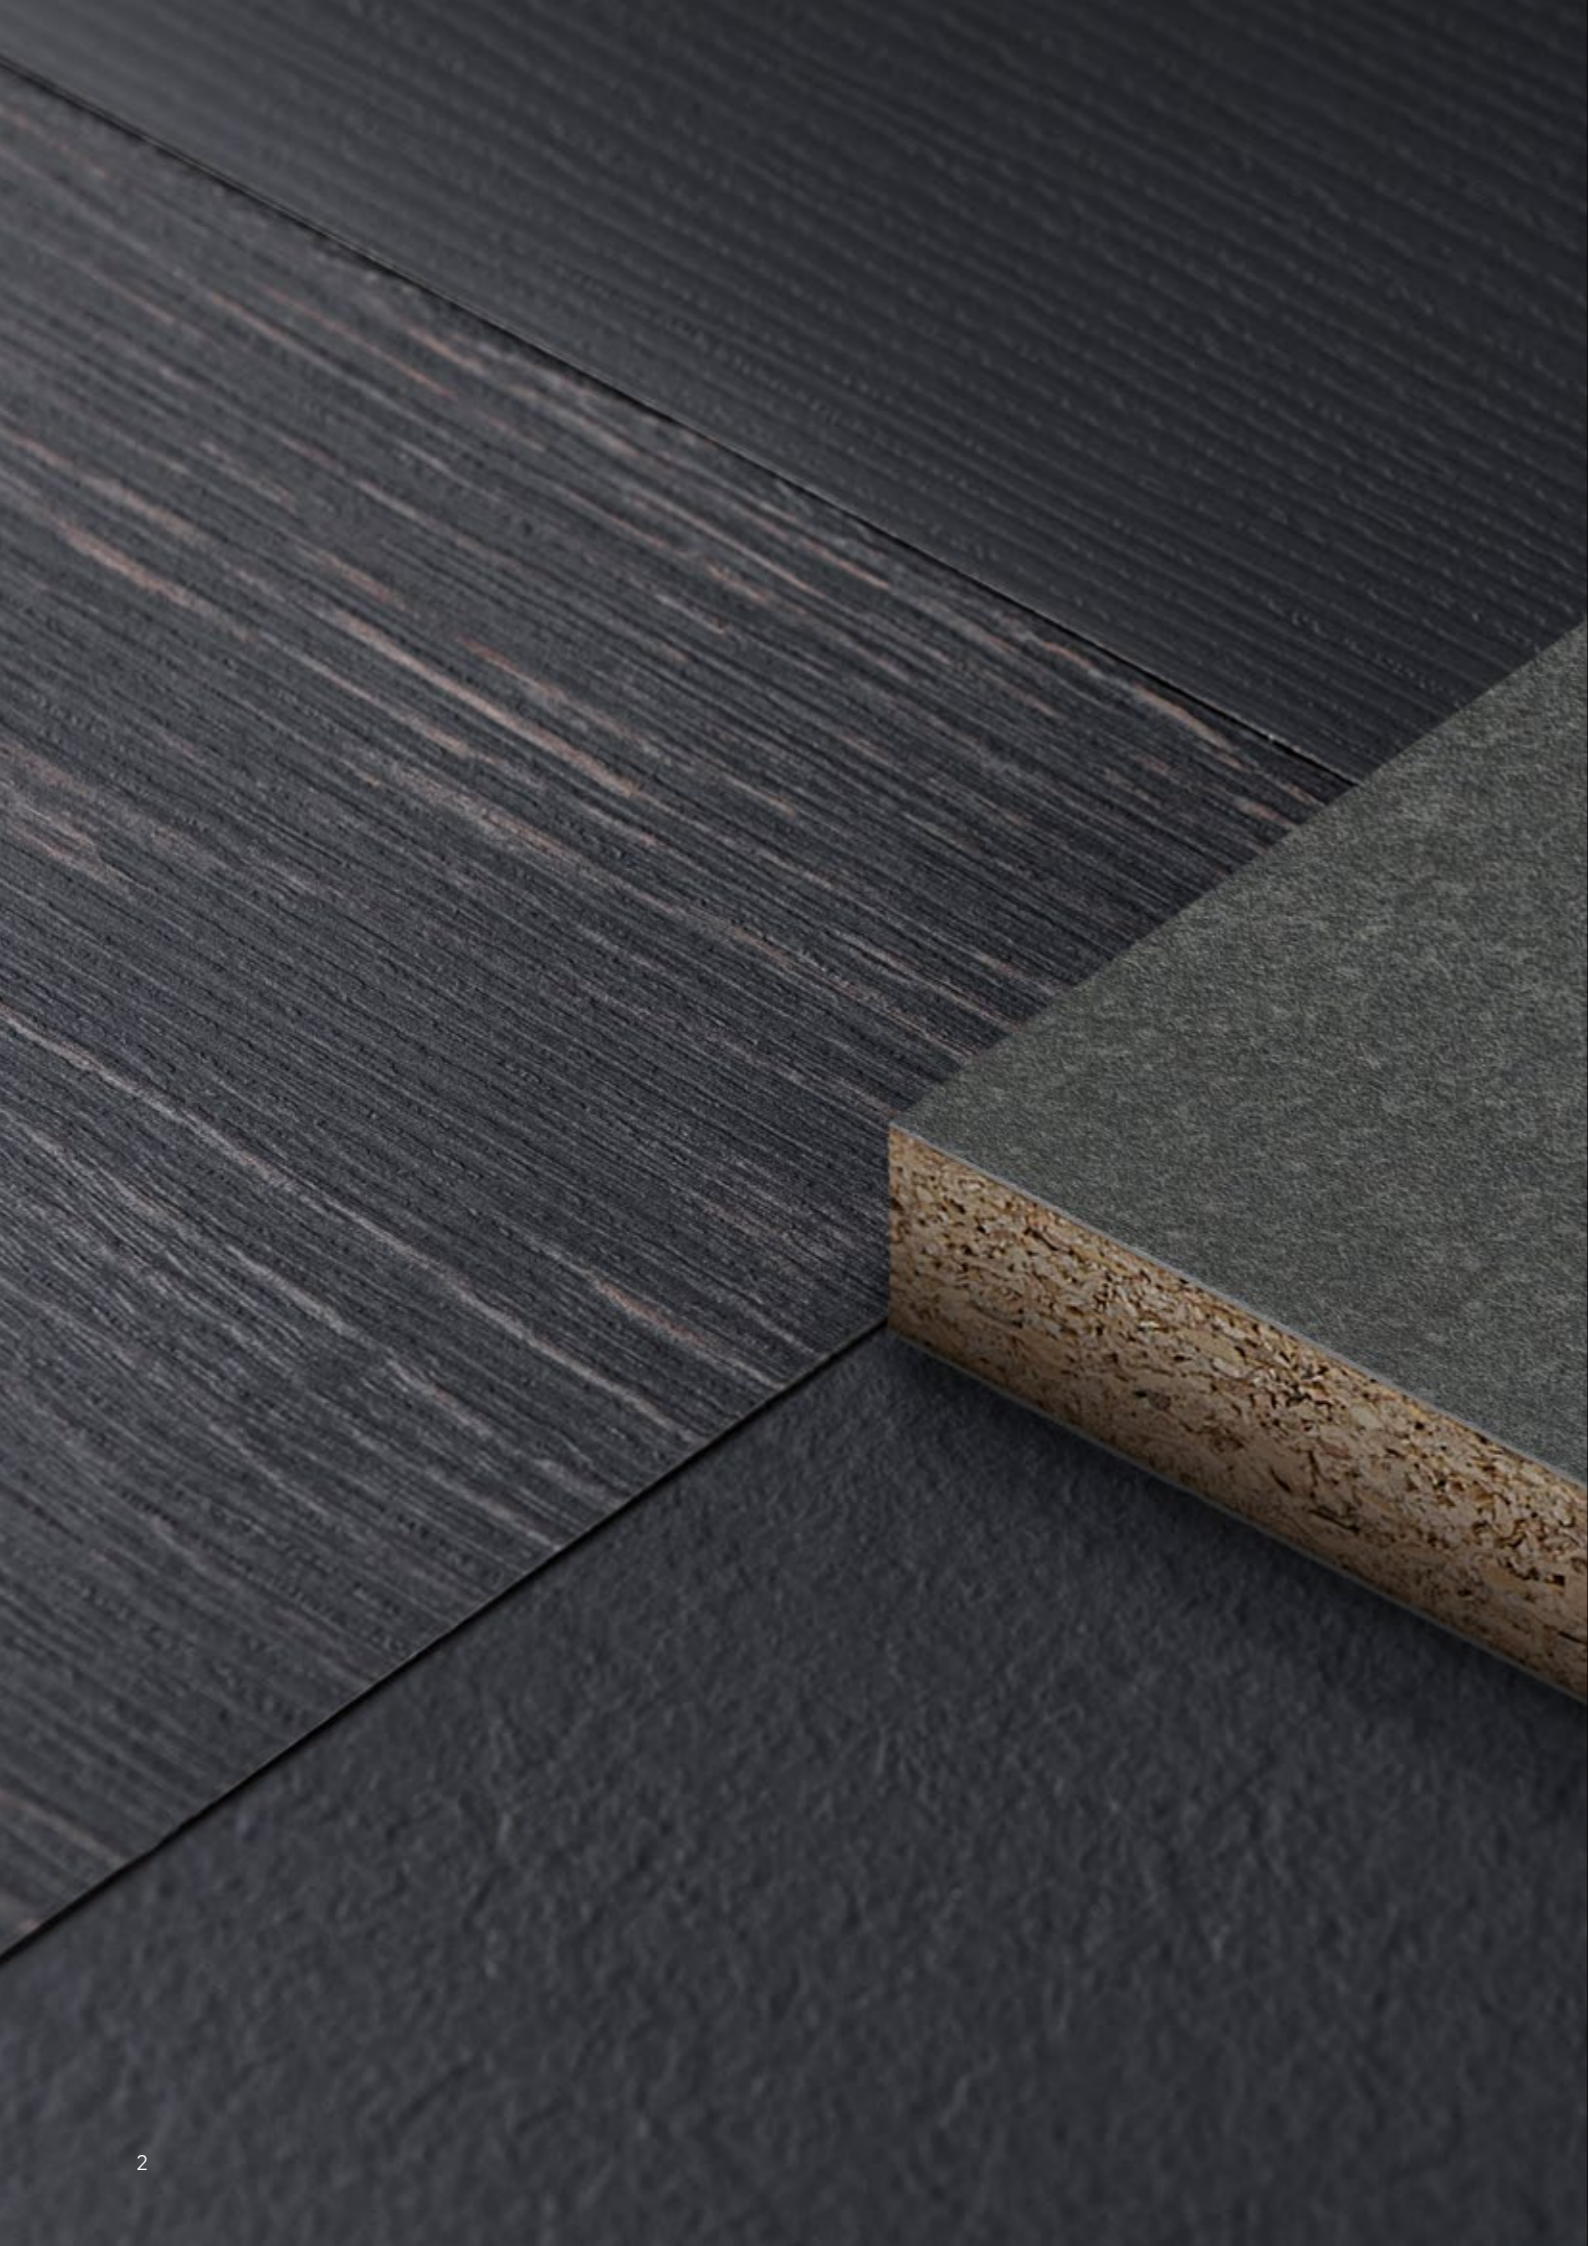

## **SUPER MATT GAINS MORE DEPTH**

Duropol XTreme Touch redefines the functional finish design options. The innovative high pressure laminate combines a super matt finish look with a natural stone or wood texture – on a material suitable for horizontal use.

### **Choice of wood or stone texture**

With Volcano and Rustic Wood, there's a choice of a stone and a wood texture that are both ideal for perfecting material finishes. Combining either texture with plain colours also results in fascinating, super matt looks that appeal to the senses.

### **Limitless flexibility**

Duropol XTreme Touch's haptic sensation is available as HPL and HPL flat bonded elements, and also as a worktop. For limitless kitchen, furniture, interior fit-out and door design flexibility.



## DUROPAL XTREME TOUCH OVERVIEW



Sensational look, fascinating feel and an unparalleled robustness that makes it suitable for everyday use. Duropal XTreme Touch combines the anti-fingerprint finish XTreme Matt with a natural-looking stone or wood texture for vertical and in particular also horizontal uses.

- Super matt finish
- Natural wood and stone texture
- Suitable for horizontal use
- Scratch and impact resistant
- Outstanding chemical and cleaning agent resistance
- Practical anti-fingerprint finish
- Free from nanoparticles
- Choice of the full decor collection spectrum (excluding mother-of-pearl and real metal finishes)
- FSC® (licence code: FSC® C011773) certification or PEFC (licence code: PEFC/04-32-0828 certification available on request

### Excellent start!

Duropal XTreme Touch also impressed the juries of internationally renowned design awards. The new finish got off to a great start with a Red Dot Award 2022 in the product design category, and a German Innovation Award 2022.



reddot winner 2022



## THE NEW FINISHES XTREME VOLCANO AND XTREME RUSTIC WOOD UP CLOSE AND PERSONAL

### Finish choice



Stone finish XTreme Volcano (XMVO)



Wood finish XTreme Rustic Wood (XMRT)

### Choice of decors

The new finishes XTreme Volcano and XTreme Rustic Wood are perfect for all design concepts across all industry segments. Just like XTreme Matt, they are available in the full Pfleiderer decor collection spectrum (excluding mother-of-pearl and real metal, for production-related reasons).

# FUNCTIONALITY DOWN TO THE LAST DETAIL: UNIQUE XTREME SURFACES.

Our innovative XTreme surfaces impress with a sophisticated look, a warm, velvety feel and a clever anti-fingerprint\*.

## PrimeBoard XTreme



The well designed decorative panel with a high quality, innovative lacquer coating. Available as XTreme Matt (XT) and XTreme High Gloss (XG). Easy to work with and extremely refined.



[www.blauer-engel.de/uz76](http://www.blauer-engel.de/uz76)

## Duopal XTreme



Extremely matt finish meets outstanding durability. The high pressure laminate for sophisticated concepts – suitable for postforming, low-maintenance and also resistant to fingerprints and grease stains.



[www.blauer-engel.de/uz76](http://www.blauer-engel.de/uz76)

## Duopal XTreme Touch



Duopal XTreme Touch combines the anti-fingerprint surface XTreme Matt with a natural-looking stone or wood texture for vertical and in particular horizontal applications.



[www.blauer-engel.de/uz76](http://www.blauer-engel.de/uz76)

## Duopal SolidColor XTreme



Extremely elegant laminate, coloured throughout, with a super-matt finish with anti-fingerprint coating – with almost invisible joints, available in contemporary and monochrome designs for sophisticated interior fit-outs.

## Duopal Compact XTreme plus



The ultimate member of the XTreme family. The compact panel Duopal Compact XTreme plus for sophisticated and robust pieces of furniture as well as fitted furniture with anti-fingerprint effect and a super-matt finish. Considerably more scratch resistant and durable than comparable matt surfaces!



[www.blauer-engel.de/uz76](http://www.blauer-engel.de/uz76)

## Duopal XTreme plus



Considerably more scratch resistant and durable than comparable matt surfaces! Duopal XTreme plus also brings the unique XTreme look and feel to horizontal surfaces and edges that are subject to heavy use.




[www.blauer-engel.de/uz76](http://www.blauer-engel.de/uz76)

\* PrimeBoard XTreme High Gloss (XG): without anti-fingerprint effect, incl. mirror finish

Pfleiderer FunXTional Products are available in a range of products – suitable for both vertical as well as horizontal applications

Product / Properties	PrimeBoard XTreme Matt (XT)	Duopal XTreme (XMSM)	Duopal XTreme Touch (XMRT / XMVO)	Duopal SolidColor XTreme (XMSM)	Duopal XTreme plus (XPSM)	Duopal Compact XTreme plus (XPSM)
Surface properties	flat	flat	structured	flat	flat	flat
Recommended for vertical application	●●●●	●●●●	●●●●	●●●●	●●●●	●●●●
Recommended for horizontal application	●○○○	●●●●	●●●●	●●●●	●●●●	●●●●
Recommended for heavy duty horizontal application	○○○○	○○○○	○○○○	○○○○	●●●●	●●●●
Suitable for postforming	○○○○	●●●●	●●●●	○○○○	○○○○	○○○○
Anti-fingerprint	●●●○	●●●●	●●●●	●●●●	●●●●	●●●●
Easy to clean	●●●○	●●●●	●●●●	●●●●	●●●●	●●●●
Decor range	●●●●	●●●●	●●●●	●○○○	●●○○	●○○○
Wear resistance	●●○○	●●○○	●●○○	●●○○	●●●●	●●●●


## Duropol XTreme Touch

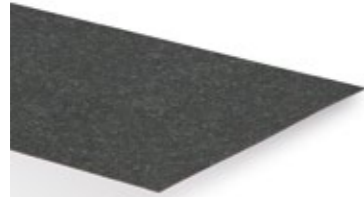

Decorative high pressure laminate in postforming quality in accordance with EN 438-3:HGP/VGP, with robust, electron beam cured surface and sanded reverse. Duropol XTreme Touch is an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure, which is one of the few products of its kind that is postformable.




### AREAS OF APPLICATION



Attractive surface material, appropriate for surface and edge applications providing the high-performance features of the well-known Duropol HPL products. Duropol XTreme Touch may be used vertically as well as horizontally.


### PRODUCT FEATURES



<b>Product standard</b>	In accordance with EN 438-3
<b>Reaction to fire</b>	Normally flammable Euroclass D-s2,d0 or worse in connection with normally and easily inflammable core boards. (EN 13501-1, CWFT acc. to 2003/593/EG)
<b>Formaldehyde emission class</b>	E1
<b>Density</b>	Min. 1,350 kg/m <sup>3</sup> (EN ISO 1183-1)
<b>Note</b>	FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness
2,050 – 5,300	1,300	0.6   0.8
4,100	1,300	0.6   0.8
5,300	1,300	0.6   0.8

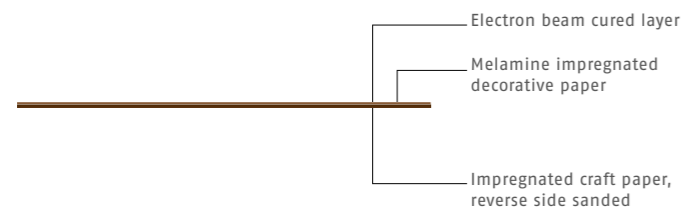

## Duropol Element XTreme Touch P2




Flat bonded element consisting of a particleboard type P2 to EN 312, surfaced on both sides with Duropol XTreme Touch, an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure.

### AREAS OF APPLICATION



Furniture production and interior design wherever high demands are made on quality and durability: For kitchen and interior design furniture, in shop fitting and partition wall construction, for interior fitting of banks, offices, schools, clinics, laboratories, retail buildings, in ship-building and motor vehicle construction.

### PRODUCT FEATURES



<b>Product standard</b>	EN 13894-1
<b>Core material</b>	ClassicBoard P2 CARB2 Low emission particleboard core, type P2 in accordance with EN 312, suitable for non load-bearing purposes in dry areas.
<b>Reaction to fire</b>	Normally flammable D-s2,d0 (EN 13501-1, CWFT acc. to 2003/593/EG); 4,100 x 1,300 x 16–25 mm
<b>EC scope</b>	EN 438-7:2005 HPL composite panel intended for internal wall and ceiling finishes (including suspended ceilings)
<b>Formaldehyde emission class</b>	E1 E05
<b>Note</b>	FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness
4,100	1,300	9.6   16   17.6   19   20.6   25   29.6   39.6






## Duropol Element XTreme Touch P3



Flat bonded element consisting of a moisture-resistant particleboard type P3 to EN 312 for damp areas, surfaced on both sides with Duropol XTreme Touch, an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure.

### AREAS OF APPLICATION



Furniture and interior fitting

Ideal for surfaces in furniture production and interior fitting where exceptional sturdiness and moisture resistance is required: For kitchen and bathroom furniture, elements in sanitary areas, in shop fitting and interior design construction, in clinics and laboratories plus workplaces such as in the foodstuffs processing industry.


### PRODUCT FEATURES




<b>Product standard</b>	EN 13894-1
<b>Core material</b>	ClassicBoard P3 Melamine resin bonded particleboard type P3, suitable for non load-bearing purposes in damp areas.
<b>Reaction to fire</b>	Normally flammable D-s2,d0 (EN 13501-1, CWFT acc. to 2003/593/EG)
<b>EC scope</b>	EN 438-7:2005 HPL composite panel intended for internal wall and ceiling finishes (including suspended ceilings)
<b>Formaldehyde emission class</b>	E1 E05
<b>Note</b>	FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness
4,100	1,300	17,6   20,6

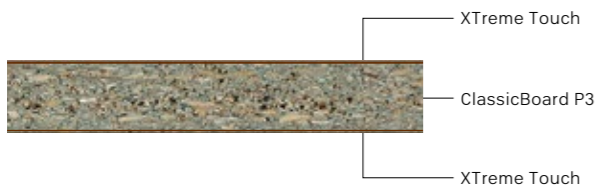

## Duropol Element XTreme Touch MDF plus

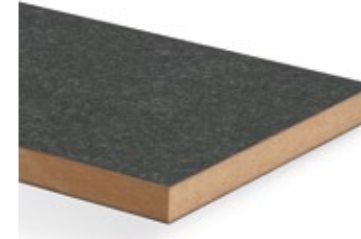

Flat bonded element consisting of a medium-density fibreboard (MDF) with uniform structure to EN 622-1, surfaced on both sides with Duropol XTreme Touch, an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure.

### AREAS OF APPLICATION



Furniture and interior fitting

Decorative, sturdy elements for furniture and interior design where a uniform core material with very high edge quality – for profiling and lacquering – is required: e. g. in restaurants and shop fitting and for office and interior furniture.


### PRODUCT FEATURES



<b>Product standard</b>	EN 13894-1
<b>Core material</b>	StyleBoard MDF plus Medium-density fibreboard (MDF) according to EN 622-1, with uniform structure.
<b>Reaction to fire</b>	Normally flammable D-s2,d0 (EN 13501-1, CWFT acc. to 2003/593/EG)
<b>Formaldehyde emission class</b>	E1 E05 CARB Phase 2 / TSCA Title VI
<b>Note</b>	FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness
4,100	1,300	17,6   20,6

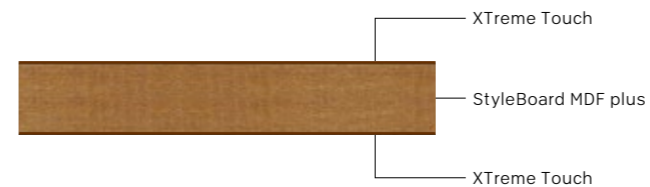


## Duropol Worktop Quadra XTreme Touch



Worktop consisting of a particleboard to EN 312, decor side bonded with robust Duropol XTreme Touch with an electron beam cured surface in accordance with EN 438, underside with water-repellent backing. The postforming front edge of the Quadra worktop has a radius of 3 mm, the rear edge is sealed with a protective edge. It is also available as a variant with both sides profiled. Duropol XTreme Touch is an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure..


### AREAS OF APPLICATION



Furniture and interior fitting

Duropol worktops can be used wherever very high demands are made on surface resistance and durability. Thanks to their hygienic advantages, the classic areas of application are in modern kitchens and bathrooms, canteens and restaurants, as well as doctors' surgeries, in laboratories and shop fitting, but also for industrial and commercial workplaces.

### PRODUCT FEATURES



### Product standard

EN 13894-1

### Core material

ClassicBoard P2 CARB2  
Low emission particleboard core, type P2 in accordance with EN 312, suitable for non load-bearing purposes in dry areas.  
ClassicBoard Hydrofuge MR CARB2  
Low Emission urea resin-bonded furniture board with reduced thickness swelling according to DIN EN 312, suitable for non-load-bearing use in humid conditions.

### Formaldehyde emission class


E1 E05  
CARB Phase 2 / TSCA Title VI

### Note

You can find comprehensive accessories for our worktop range at [www.pfleiderer.com](http://www.pfleiderer.com).  
FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness	DESIGN OF	
			front edge	rear edge
4,100	600   900   1,200	28   38	Quadra	protective edge
4,100	650	38	Quadra	protective edge
4,100   5,300	900	38	Quadra	Quadra
5,300	600   900   1,200	38	Quadra	protective edge

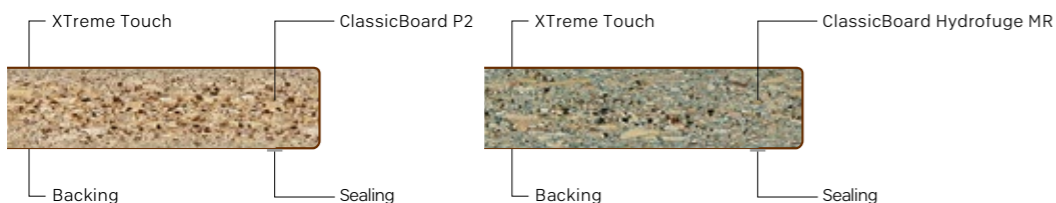

## Duropol Worktop PerForm XTreme Touch



Worktop consisting of a particleboard to EN 312, decor side bonded with robust Duropol XTreme Touch with an electron beam cured surface in accordance with EN 438, underside with water-repellent backing. The front longitudinal edge of the PerForm worktop has a laser edge, the rear edge is sealed with a protective edging strip. It is also available as a variant with a laser edge on both sides. Duropol XTreme Touch is an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure.

### AREAS OF APPLICATION



Furniture and interior fitting

Duropol worktops can be used wherever very high demands are made on surface resistance and durability. Thanks to their hygienic advantages, the classic areas of application are in modern kitchens and bathrooms, canteens and restaurants, as well as doctors' surgeries, in laboratories and shop fitting, but also for industrial and commercial workplaces.

### PRODUCT FEATURES



### Product standard

EN 13894-1

### Core material

ClassicBoard P2 CARB2  
Low emission particleboard core, type P2 in accordance with EN 312, suitable for non load-bearing purposes in dry areas.

### Formaldehyde emission class


E1 E05  
CARB Phase 2 / TSCA Title VI

### Note

You can find comprehensive accessories for our worktop range at [www.pfleiderer.com](http://www.pfleiderer.com).  
FSC® certification or PEFC certification available on request.

### FORMAT IN MM

Length	Width	Thickness	DESIGN OF	
			front edge	rear edge
4,100	600   900   1,200	38	laser edge	protective edge

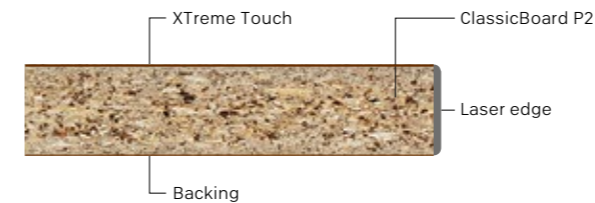



## Duopal Worktop XTreme Touch, square edged profile



Worktop consisting of a particleboard to EN 312, decor side bonded with robust Duopal XTreme Touch with an electron beam cured surface in accordance with EN 438, underside with water-repellent backing. The longitudinal edges of the worktop are machined. It is also available as a variant with a protective edge on one side. Duopal XTreme Touch is an attractive supermatt surface material with an anti-fingerprint effect in combination with natural-looking stone or wood structure.

### AREAS OF APPLICATION



Furniture and interior fitting

Duopal worktops can be used wherever very high demands are made on surface resistance and durability. Thanks to their hygienic advantages, the classic areas of application are in modern kitchens and bathrooms, canteens and restaurants, as well as doctors' surgeries, in laboratories and shop fitting, but also for industrial and commercial workplaces.

### PRODUCT FEATURES



Variety of decors and / or textures



Easy care



Anti-fingerprint



Food harmless



Particularly low emission

### Product standard

EN 13894-1

### Core material

ClassicBoard P2 CARB2

Low emission particleboard core, type P2 in accordance with EN 312, suitable for non load-bearing purposes in dry areas.

### Formaldehyde emission class

E1 E05


CARB Phase 2 / TSCA Title VI

### Note

You can find comprehensive accessories for our worktop range at [www.pfleiderer.com](http://www.pfleiderer.com). FSC® certification or PEFC certification available on request.

### FORMAT IN MM


Length	Width	Thickness	DESIGN OF	
			front edge	rear edge
4,100   5,300	600   900   1,200	38	milled	milled
4,100   5,300	600   900   1,200	38	protective edge	milled

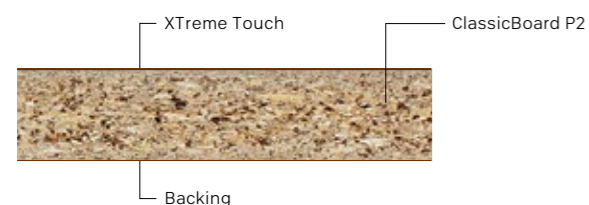

## DESIGNED FOR A FUTURE WORTH LIVING: SUSTAINABILITY AT PFLEIDERER.

### Responsibility for tomorrow starts today.



Those who rely on wood as a raw material rightly expect an environmentally conscious "green" material. We at Pflöiderer want to do full justice to this and have therefore been offering an extensive range of low-emission and environmentally friendly products for many years. Sustainability – in addition to ecological, social and economic aspects – as well as careful use of natural resources are permanent pillars of our corporate philosophy.

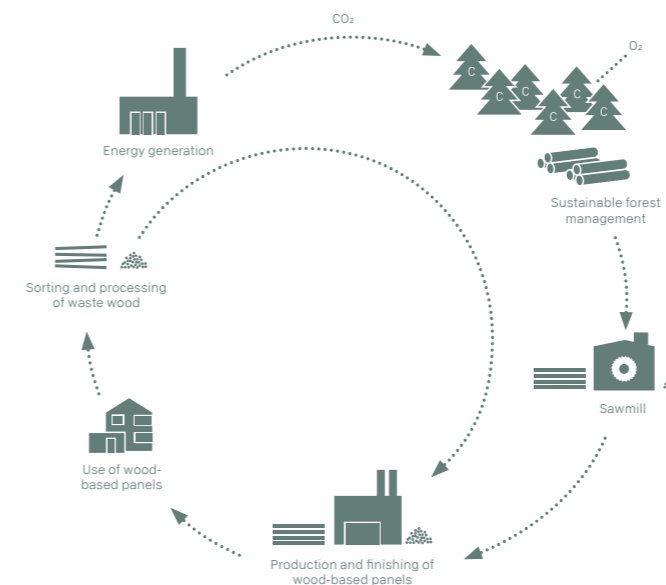

Through multi-stage wood utilisation (so-called cascade utilisation), wood recycling, and the use of forestry wood and industrial waste wood for high quality materials with a long service life, Pflöiderer conserves valuable resources and actively contributes to reducing carbon emissions, air, water and soil pollution as well as the reduction of energy consumption. We control the wood mix individually, depending on the product, to achieve a perfect balance between quality requirements and resource conservation.





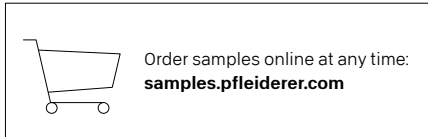

© Copyright 2022 Pfleiderer Deutschland GmbH.

This information is issued with great care. We do not however accept any responsibility for the accuracy, completeness and timeliness. There may be slight colour differences between the printed brochure image and the actual design.

Due to the continuous development and modification of our products, possible changes to the relevant standards, laws and regulations, our technical data sheets and product documents expressly do not represent a legally binding guarantee of the properties specified therein. In particular, no suitability for a specific purpose can be derived from this information. It is therefore the personal responsibility of the individual user to check the processing and suitability of the products described in this document for the intended use and to take into account the legal framework and the current state of the art. Furthermore, we expressly refer to the validity of our general terms and conditions.

You can find our general terms and conditions on our webpage: [www.pfleiderer.com](http://www.pfleiderer.com)

#### Pfleiderer uses wood from Certified Sustainable Forest Management.



MADE IN GERMANY

#### Good to know: the Pfleiderer quality promise.

Pfleiderer wood-based panels stand for quality without compromise. We use sustainable raw materials and state-of-the-art production processes and we are fully committed to our site in Germany. For more information, visit [quality.pfleiderer.com](http://quality.pfleiderer.com).

**Pfleiderer UK Limited** · Greenway House · Larkwood Way · Tytherington Business Park · Macclesfield · Cheshire SK10 2XR · England  
Tel.: +44 (0) 16 25 660 410 · [www.pfleiderer.com](http://www.pfleiderer.com)

**Pfleiderer Deutschland GmbH** · Ingolstädter Straße 51 · 92318 Neumarkt · Germany  
Tel.: +49 (0) 91 81 / 28 480 · Fax: +49 (0) 91 81 / 28 482 · [info@pfleiderer.com](mailto:info@pfleiderer.com) · [www.pfleiderer.com](http://www.pfleiderer.com)